

H.264 Megapixel Surveillance Camera

TL-SC3230

⦿ Features:

- 1.3 megapixel progressive scan CMOS sensor produces high definition video quality
- Micro SD card local storage and Network Storage(NAS) for convenient video recording
- H.264 and MJPEG video streaming for different quality requirements and bandwidth environments
- Multiple easy remote viewing options; watch live video via mobile phones, laptops or tablets
- Email or FTP notifications triggered by motion detection, audio detection or scheduled timer offer sensitive invasion alerts
- 10x digital zoom for detailed close-ups
- 2-way audio allows users to listen and speak remotely
- Advanced SSL/HTTPS encryption and IP filter protect users' privacy from malicious intrusions
- Free bundled software supports simultaneous monitoring of up to 64 cameras
- Quick universal plug and play installation



⦿ Description:

With its built-in high performance 1.3Mega-Pixel sensor, the TL-SC3230 is excellent for homes, shops, banks, offices and other building surveillance where clearer video and more image detail are required. What is more exciting is that wherever users are, high definition video can be delivered to them with the most fluidity, through a standard web browser or 3G device so that users will be to stay close to what they care for most.


With simple installation, event alerts, 2-way audio and other practical functions, the TL-SC3230 is a perfect solution for the advanced viewer with attention to detail.

⦿ Specifications:

Camera	
Image sensor	1/4" Progressive scan CMOS sensor
Resolution	1.3 Megapixel (1280 x 1024)
Lens	F: 1.8, f: 4.3 mm
Digital Zoom	10x Digital
Minimum Illumination	0.5 Lux
Video	
Video Compression	H.264, MJPEG
Frame Rate vs. Resolution	Max. 30 fps at 1280x1024 (1.3 Mega-Pixel) Max. 30 fps at 640x480 (0.3 Mega-Pixel)
Video Streaming	Simultaneous MJPEG, H.264 and 3GPP (Dual streaming) Controllable Frame rate and bandwidth Support Unicast and Multicast Support 3GPP/ISMA RTSP (Real Time Streaming Protocol)
Image Settings	Rotation: Mirror, Flip, Mirror Flip Configurable brightness, contrast, saturation Overlay capabilities: time, date, text and privacy image
Audio	
Audio Communication	2-Way full duplex
Input	Built-in microphone
Output	Audio line output connector for external speaker
Audio Compression	G.711 μ law, a law, and AMR
Alarm and Event Management	
Input trigger	Motion detection, audio detection, schedule and network link down
Output notification	Micro SD memory card, Network Attached Storage, FTP and SMTP
Network	
Protocol	Bonjour, TCP/IP, DHCP, PPPoE, ARP, ICMP, FTP, SMTP, DNS, NTP, UPnP, RTSP, RTP, RTCP, HTTP, TCP, UDP, 3GPP/ISMA RTSP
Security	Multiple password-protected user levels, HTTPS encryption, IP Filter
Interface	
Network Interface	RJ-45 for Ethernet 10/100 Base-T
Power Connector	DC power jack
Audio Output	3.5 mm jack for line out
Button	Reset push button
Slot	SD/SDHC memory card slot

Surveillance Management	
Users	10 simultaneous unicast users Unlimited number of users via multicast
Bundled Management Software	Viewing and recording up to 64 cameras
System Requirements	
Supported Browser	Microsoft Internet Explorer 6 or higher Firefox 2.0 or higher, Safari, Google Chrome
Operating System	Windows 7/Vista/XP
General	
External Power Supply	12V DC, Max 12W
Certifications	RoHS, FCC, CE
Operating Temperature	0 °C~ 40 °C (32 °F~ 104 °F)
Operating Humidity	10%~90%RH, Non-condensing
Dimensions (W x D x H)	2.9 x 2.1 x 1.4 in (74.5 x 54.3 x 34.7mm)

Diagram:

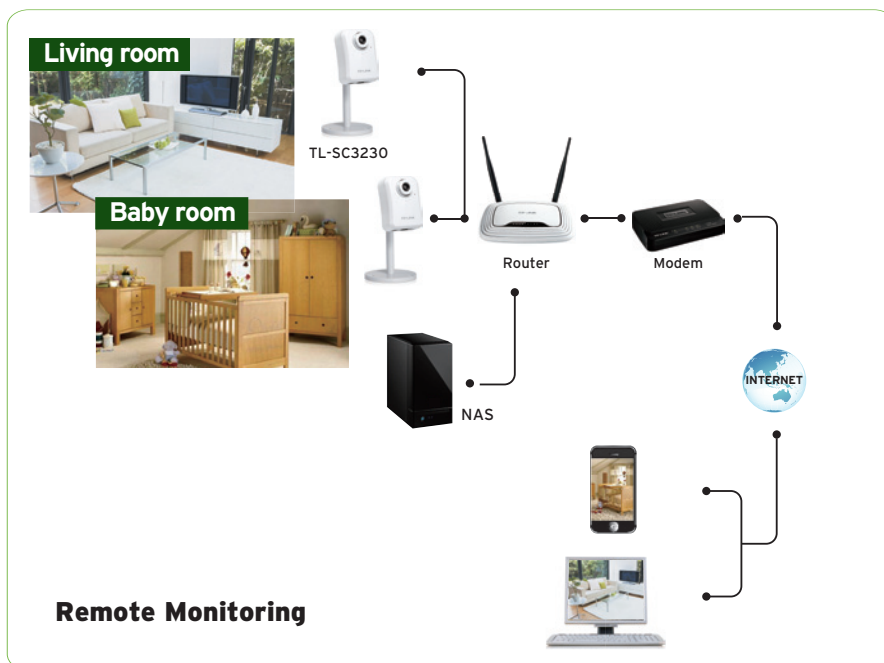

Package:

- H.264 Megapixel Surveillance Camera TL-SC3230
- Power Adaptor
- RJ-45 Ethernet Cable
- Quick Installation Guide
- Resource CD
- Camera Mount Kit